



## Foot switch with thermoplastic enclosure


KF 1PW - 2m

Material no.: 1049149 (material no. old: 88131004)

### Product features

- Thermoplastic enclosure
- Small flat design
- Micro switches (1-pole change over contact) for current load up to 5 A
- With pre-wired cable

### Dimensions

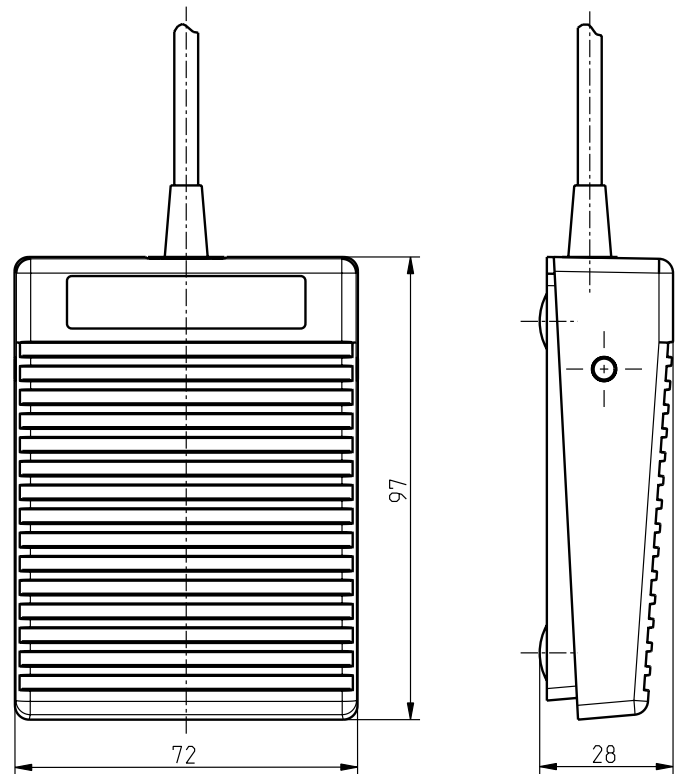

### Technical data

#### Applied standards

EN 60947-5-1

#### Enclosure

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

#### Pedal

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

#### Degree of protection

IP65 (IEC/EN 60529)

#### Connection

cable 3 x AWG 20

#### Cable length

2 m

#### Cable diameter

4.8 mm  $\pm$ 3%

#### Cable cross-section

3 x 0.52 mm<sup>2</sup>

#### Switching system

micro switch

#### Switching elements

1-pole change-over contact

#### Switching voltage

12 ... 250 VAC/DC

#### Switch-on current

max. 5 A

#### Switch-on power

max. 1250 VA

#### Short-circuit protection

5 A gG/gN fuse

#### Ambient temperature

-10 °C ... +60 °C

#### Mechanical life

> 1 million operations

#### Approvals



#### Weight

220 g

Errors and omissions excepted.



Foot switch with thermoplastic enclosure

KF 1PW - 2m

Material no.: 1049149 (material no. old: 88131004)

Contact diagram

---

