

## O200.GR.F-PV1Z.72NV/BX15

Diffuse sensors with background suppression - miniature

Article number: 11210938

### Overview

- Outstanding reliability and unrivalled immunity against ambient light
- V-optics for detection of shiny or transparent objects
- Reproducible and color-independent switching distances
- Fixed preset for the simplest commissioning
- Robust housing with stainless steel spacer sleeves



Picture similar



### Technical data

#### General data

Type	Background suppression
Version	Fixed focus
Sensing distance Tw	15 mm
Sensing range Tb	3 ... 15 mm
Smallest object recognizable typ.	0.05 mm at 10 mm
Power on indication	LED green
Alignment / soiled lens indicator	Flashing output indicator
Output indicator	LED yellow
Sensing distance adjustment	No
Suppression of reciprocal influence	Yes
Alignment optical axis	< 1,5°

#### Light Source

Light source	Pulsed red LED
Wave length	644 nm

#### Electrical data

Response time / release time	< 1 ms
Voltage supply range +Vs	10 ... 30 VDC

#### Electrical data

Current consumption max. (no load)	20 mA (@ 30 VDC)
Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	<2 VDC
Output function	Light / dark operate
Output circuit	PNP complementary
Output current	50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

#### Mechanical data

Width / diameter	8 mm
Height / length	25.1 mm
Depth	14.1 mm
Design	Rectangular
Mechanical mounting	Sleeve smooth (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Flylead connector M8 4 pin, L=200 mm
Cable characteristics	PVC / PVC 4 x 0.08 mm <sup>2</sup>

#### Ambient conditions


Protection class	IP 67
Operating temperature	-25 ... +50 °C

# O200.GR.F-PV1Z.72NV/BX15


Diffuse sensors with background suppression - miniature

Article number: 11210938


## Dimension drawing

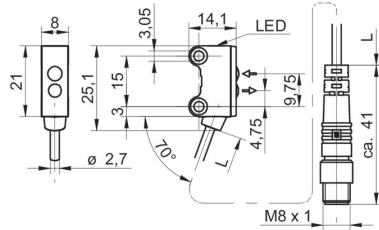


## Sensing distance diagram

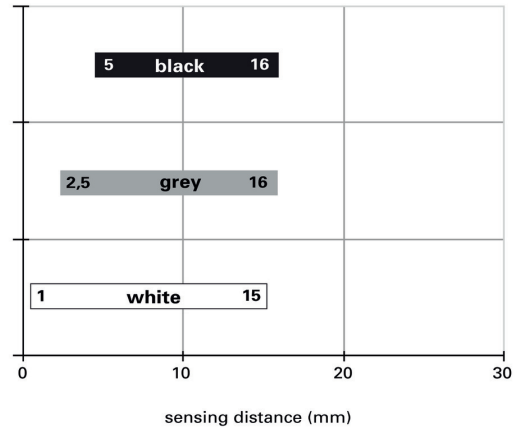

## Connection diagram

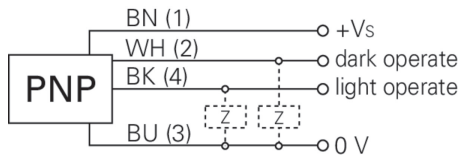

## Pin assignment



## Beam characteristic (typically)

